

SPECIFICATIONS

Signal System	NTSC	PAL
Total/ Effective pixels	410K/380K	470K/440K
Pick-up Device	1/3 type interline super HAD CCD(SONY)	
Lens	Auto iris	
Lens Mount	Board	
Signal Process	Digital Signal Process	
Scanning System	2:1 interlace	
Sync. System	Internal	
Scanning Frequency	59.94Hz(VD)	50Hz(VD)
Resolution	550 TV lines(H)	
S/N Ratio	More than 48dB	
Standard Illuminance	2000Lux (3200 °K)	
Video Output	1.0Vpp composite(75Ω)	
Sensitivity	0.2Lux	
Shutter Speed	1/60 ~ 1/100,000sec	1/50 ~ 1/100,000sec
Power Source	DC10V ~ 14V	
Power Consumption	Less than 1.0Watts	
Operating Temperature	-10°C ~ 50°C (Humidity : 0%RH ~ 80%RH)	
Storage Temperature	-20°C ~ 60°C (Humidity : 0%RH ~ 85%RH)	
Dome Size(mm)	100(Ø)	
Weight	800g (With Cable)	

INSTRUCTION MANUAL

1/3" DSP COLOR DOME CAMERA



Caution

RISK OF ELECTRIC SHOCK DO NOT OPEN

CAUTION : TO REDUCE THE RISK OF ELECTRIC SHOCK DO NOT REMOVE THE COVER(OR BACK). NO USER-SERVICEABLE PARTS INSIDE, REFER FOR SERVICE TO QUALIFIED SERVICE PERSONNEL.





The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO WATER, OR WET LOCATIONS.

DIMENSIONS AND CONNECTION

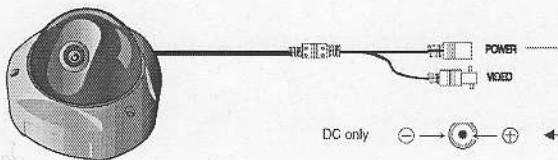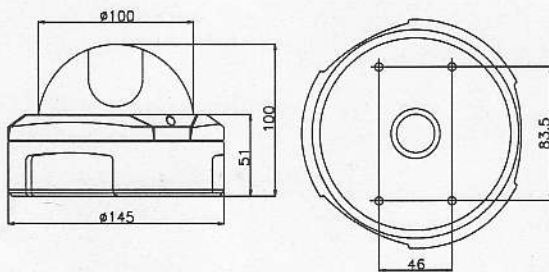

INSTALLATION

