


# COLOR COVERT CAMERA

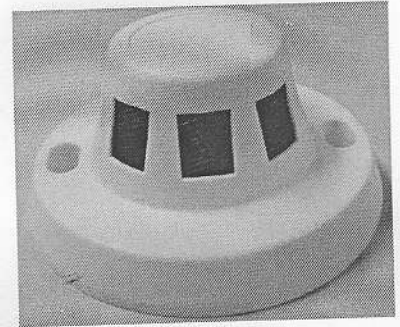

## Features

- 1/3" Interline Super HAD CCD(SONY)
- High Sensitivity
- Low Smear
- 550TVL(410K Pixels)

## Specifications

	NTSC	PAL
Signal System	NTSC	PAL
Total Pixels	410K/380K	470K/440K
Pick-Up Device	1/3" Interline Super HAD CCD(SONY)	
Lens	Fixed Pinhole Lens (F=3.7)	
Signal Process	Digital Signal Process	
Scanning System	2:1 Interface	
Sync. System	Internal	
Scanning Frequency	59.94Hz(VD)	50Hz(VD)
Resolution	550 TV Lines(H)	
S/N Ratio	More than 48dB	
Standard Illuminance	2000 Lux (3200°K)	
Sensitivity	0.2 Lux F2.0	
Video Output	1.0 Vp-p Composite (75Ω)	
Gain Control	On	
Flickerless	Off	
White Balance	Auto	
Back Light	Off	
Shutter Speed	1/60 ~ 1/100,000 sec	1/50 ~ 1/100,000 sec
Power Source	DC 10V ~ 14V	
Power Consumption	Less than 1.4Watts	
Operating Temp.	-10°C ~ 50°C (Humidity :0%RH ~ 80%RH)	
Storage Temp.	-20°C ~ 60°C (Humidity :0%RH ~ 85%RH)	
Weight	294 g	

## Dimensions

